

ICAAART 2010

2nd International Conference on Agents and Artificial Intelligence

Proceedings



Volume 1

Valencia, Spain · 22 - 24 January, 2010

ORGANIZED BY



IN COOPERATION WITH



ICAART 2010

Proceedings of the
2nd International Conference on
Agents and Artificial Intelligence

Volume 1
Artificial Intelligence

Valencia, Spain

January 22 - 24, 2010

Organized by
**INSTICC – Institute for Systems and Technologies of Information, Control
and Communication**

In Cooperation with
AAAI – Association for the Advancement of Artificial Intelligence
APPIA – Portuguese Association for Artificial Intelligence
AEPIA – Spanish Association of Artificial Intelligence
WfMC – Workflow Management Coalition
**ACM SIGART – Association for Computing Machinery / Special Interest
Group on Artificial Intelligence**

Copyright © 2010 INSTICC – Institute for Systems and Technologies of
Information, Control and Communication
All rights reserved

Edited by Joaquim Filipe, Ana Fred and Bernadette Sharp

Printed in Portugal
ISBN: 978-989-674-021-4
Depósito Legal: 303437/09

<http://www.icaart.org/>
icaart.secretariat@insticc.org

BRIEF CONTENTS

INVITED SPEAKERS IV

ORGANIZING AND STEERING COMMITTEES V

PROGRAM COMMITTEE VI

AUXILIARY REVIEWERS IX

SELECTED PAPERS BOOK IX

FOREWORD XI

CONTENTS XIII

INVITED SPEAKERS

Yves Demazeau

Laboratoire d'Informatique de Grenoble

France

Tim Finin

University of Maryland

U.S.A.

Leonid Perlovsky

Harvard University

U.S.A.

Vicent J. Botti i Navarro

Universidad Politécnica de Valencia

Spain

Peter D. Karp

Bioinformatics Research Group, Artificial Intelligence Center, SRI International

U.S.A.

Amilcar Cardoso

University of Coimbra

Portugal

ORGANIZING AND STEERING COMMITTEES

CONFERENCE CO-CHAIRS

Joaquim Filipe, Polytechnic Institute of Setúbal / INSTICC, Portugal

Ana Fred, Technical University of Lisbon / IT, Portugal

PROGRAM CHAIR

Bernadette Sharp, Staffordshire University, U.K.

PROCEEDINGS PRODUCTION

Helder Coelhas, INSTICC, Portugal

Andreia Costa, INSTICC, Portugal

Bruno Encarnação, INSTICC, Portugal

Bárbara Lima, INSTICC, Portugal

Liliana Medina, INSTICC, Portugal

Carla Mota, INSTICC, Portugal

Vitor Pedrosa, INSTICC, Portugal

José Varela, INSTICC, Portugal

CD-ROM PRODUCTION

Elton Mendes, INSTICC, Portugal

Pedro Varela, INSTICC, Portugal

GRAPHICS PRODUCTION AND WEBDESIGNER

Bruno Encarnação, INSTICC, Portugal

SECRETARIAT

Patrícia Alves, INSTICC, Portugal

WEBMASTER

Sérgio Brissos, INSTICC, Portugal

PROGRAM COMMITTEE

Stéphane Airiau, University of Amsterdam, The Netherlands

Natasha Alechina, University of Nottingham, U.K.

Sander Bohte, CWI, The Netherlands

Luigi Ceccaroni, UPC - Barcelona Tech, Spain

Berndt Farwer, Durham University, U.K.

Nicoletta Fornara, Università della Svizzera Italiana, Switzerland

Cees Witteveen, Delft University of Technology, The Netherlands

Thomas Ågotnes, University of Bergen, Norway

Rudolf Albrecht, University of Innsbruck, Austria

Cesar Analide, University of Minho, Portugal

Andreas Andreou, University of Cyprus, Cyprus

Ioannis N. Athanasiadis, IDSIA, Switzerland

Antonio Bahamonde, Universidad de Oviedo, Spain

Matteo Baldoni, Università Degli Studi Di Torino, Italy

Bikramjit Banerjee, University of Southern Mississippi, U.S.A.

Ana Lúcia C. Bazzan, UFRGS, Brazil

Orlando Belo, University of Minho, Portugal

Carole Bernon, University of Toulouse III, France

Daniel Berrar, University of Ulster, U.K.

Ateet Bhalla, Technocrats Institute of Technology, India

Olivier Boissier, ENSM-SE, France

Tibor Bosse, Vrije Universiteit Amsterdam, The Netherlands

Luis Botelho, Superior Institute of Labour and Enterprise Sciences, Portugal

Danielle Boulanger, Université Jean Moulin Lyon 3, France

Paolo Bresciani, European Commission, Belgium

Egon L. van den Broek, Human-Centered Computing Consultancy, The Netherlands

Silvia Calegari, Università Degli Studi Di Milano Bicocca, Italy

Valérie Camps, IRIT - Université Paul Sabatier, France

Jose Jesus Castro-schez, Escuela Superior de Informatica, Spain

Radovan Cervenka, Whiteston Technologies, Slovak Republic

Georgios Chalkiadakis, University of Southampton, U.K.

Shyi-Ming Chen, National Taiwan University of Science and Technology, Taiwan

Carlos Iván Chesñear, Universidad Nacional del Sur, Argentina

Adam Cheyer, SRI International, U.S.A.

Paolo Ciancarini, University of Bologna, Italy

Diane Cook, Washington State University, U.S.A.

Paulo Cortez, University of Minho, Portugal

Jacob W. Crandall, Masdar Institute of Science and Technology, U.A.E.

Yves Demazeau, CNRS, France

Andreas Dengel, German Research Center for Artificial Intelligence (DFKI GmbH), Germany

Gaël Dias, University of Beira Interior, Portugal

Ian Dickinson, HP Laboratories, Bristol, U.K.

Edith Elkind, Nanyang Technological University, Singapore

Stefano Ferilli, Università di Bari, Italy

Antonio Fernández-caballero, Universidad de Castilla-la Mancha, Spain

Edilson FERNEDA, Catholic University of Brasília, Brazil

Dariusz Frejlichowski, West Pomeranian University of Technology, Poland

Naoki Fukuta, Shizuoka University, Japan

PROGRAM COMMITTEE (CONT.)

Wai-Keung Fung, University of Manitoba, Canada

Arnulfo Alanis Garza, Instituto Tecnológico de Tijuana, Mexico

Chiara Ghidini, Fondazione Bruno Kessler - IRST, Italy

Joseph Giampapa, Carnegie Mellon University, U.S.A.

Marie-Pierre Gleizes, Université Paul Sabatier, France

Dominic Greenwood, Whitestein Technologies AG, Switzerland

Sven Groppe, University of Lübeck, Germany

Zahia Guessoum, UPMC, France

Renata Guizzardi, Universidade Federal do Espírito Santo, Brazil

Andreas Herzig, Université Paul Sabatier & CNRS, France

Wladyslaw Homenda, Warsaw University of Technology, Poland

Wei-Chiang Hong, Oriental Institute of Technology, Taiwan

Mark Hoogendoorn, Vrije Universiteit Amsterdam, The Netherlands

Eyke Hüllermeier, Philipps University of Marburg, Germany

Carlos Iglesias, Universidad Politécnica de Madrid, Spain

François Jacquenet, University of Saint-Étienne, France

Yanguo Jing, London Metropolitan University, U.K.

W. Lewis Johnson, Alelo Inc., U.S.A.

Catholijn Jonker, Delft University of Technology, The Netherlands

Lalana Kagal, MIT, U.S.A.

Matthias Klusch, Deutsches Forschungszentrum für Künstliche Intelligenz, Germany

Joanna Kolodziej, University of Bielsko-Biala, Poland

Sébastien Konieczny, CNRS - CRIL, France

Igor Kotenko, St. Petersburg Institute for Informatics and Automation of the Russian Academy of Science, Russian Federation

Stan Kurkovsky, Central Connecticut State University, U.S.A.

Nuno Lau, University of Aveiro, Portugal

Ho-fung Leung, The Chinese University of Hong Kong, Hong Kong

Baoding Liu, Tsinghua University, China

Chao-Lin Liu, National Chengchi University, Taiwan

Stephane Loiseau, Leria, France

Gabriel Pereira Lopes, FCT/UNL, Portugal

Hongen Lu, La Trobe University, Australia

Bernd Ludwig, University of Erlangen-Nürnberg, Germany

José Machado, University of Minho, Portugal

Nadia Magnenat-thalmann, University of Geneva, Switzerland

Pierre Maret, Université de Saint Etienne, France

Tokuro Matsuo, Yamagata University, Japan

Nicola Di Mauro, Università di Bari, Italy

Amnon Meisels, Ben-Gurion University, Israel

Benito Mendoza, ExxonMobil Research and Engineering, U.S.A.

Daniel Merkle, University of Southern Denmark, Denmark

Bernd Meyer, Monash University, Australia

Simon Miles, King's College London, U.K.

Pavlos Moraitis, Paris Descartes University, France

Thierry Moyaoux, Université de Lyon (INSA), France

Tracy Mullen, The Pennsylvania State University, U.S.A.

Radhakrishnan Nagarajan, University of Arkansas for Medical Sciences, U.S.A.

Tomoharu Nakashima, Osaka Prefecture University, Japan

PROGRAM COMMITTEE (CONT.)

Paulo Novais, Universidade do Minho, Portugal

Charlie L. Ortiz, SRI International, U.S.A.

Jeng-Shyang Pan, National Kaohsiung University of Applied Sciences, Taiwan

Oscar Pastor, Universidad Politécnica de Valencia, Spain

Krzysztof Patan, University of Zielona Gora, Poland

Catherine Pelachaud, CNRS - Télécom ParisTech, France

Wojciech Penczek, Institute of Computer Science, Poland

Dana Petcu, Western University of Timisoara, Romania

Steve Phelps, University of Essex, U.K.

Rui Prada, IST and INESC-ID, Portugal

Rong Qu, University of Nottingham, U.K.

T. Ramayah, Universiti Sains Malaysia, Malaysia

Martin Reháč, Czech Technical University in Prague, Czech Republic

Luís Paulo Reis, FEUP/LIACC - Faculdade de Engenharia da Universidade do Porto, Portugal

Daniel Rodriguez, University of Alcalá, Spain

Pilar Rodriguez, Universidad Autónoma de Madrid, Spain

Rosaldo Rossetti, Laboratório de Inteligência Artificial e Ciência de Computadores, LIACC/FEUP, Portugal

Alessandro Saffiotti, Orebro University, Sweden

Manuel Filipe Santos, University of Minho, Portugal

Jurek Sasiadek, Carleton University, Canada

Camilla Schwind, CNRS, France

Candace L. Sidner, BAE Systems AIT, U.S.A.

Peer Olaf Siebers, Nottingham University, U.K.

Viviane Silva, Universidade Federal Fluminense, Brazil

Adam Slowik, Koszalin University of Technology, Poland

Alexander Smirnov, SPIIRAS, Russian Academy of Sciences, Russian Federation

Safeullah Soomro, Yanbu University College, Saudi Arabia

Kostas Stathis, University of London, U.K.

Kathleen Steinhofel, King's College London, U.K.

Thomas Stütze, Université Libre de Bruxelles, Belgium

Chun-Yi Su, Concordia University, Canada

Shiliang Sun, East China Normal University, China

Ryszard Tadeusiewicz, AGH University of Science and Technology, Poland

Paola Turci, University of Parma, Italy

Franco Turini, KDD Lab, University of Pisa, Italy

Paulo Urbano, Faculdade de Ciências da Universidade de Lisboa, Portugal

Ioannis Vlahavas, Aristotle University of Thessaloniki, Greece

Wutnipong Warakraisawad, Bangkok University, Thailand

Bozena Wozna-Szczesniak, Jan Dlugosz University, Poland

Seiji Yamada, National Institute of Informatics, Japan

Xin-She Yang, National Physical Lab, U.K.

Huiyu Zhou, Queen's University Belfast, U.K.

AUXILIARY REVIEWERS

Juan José Del Coz, Artificial Intelligence Centre - University of Oviedo, Spain

Jorge Diez, Artificial Intelligence Center, Spain

Alessandro Farinelli, University of Verona, Italy

Ya Gao, East China Normal University, China

Sergio Alejandro Gómez, Universidad Nacional del Sur, Argentina

Tal Grinshpoun, Ben-Gurion University, Israel

Rongqing Huang, East China Normal University, China

You Ji, East China Normal University, China

Carson K. Leung, University of Manitoba, Canada

Jinbo Li, East China Normal University, China

Oscar Luaces, Universidad de Oviedo en Gijón, Spain

Pedro Moreira, Escola Superior de Tecnologia e Gestão - Instituto Politécnico de Viana do Castelo, Portugal

Maxime Morge, University of Lille, France

Matthijs Pontier, VU University, Amsterdam, The Netherlands

José Ramón Quevedo, University of Oviedo, Spain

Daniel Castro Silva, FEUP / LIACC, Portugal

Frans Van der Sluis, University of Twente, The Netherlands

Jung-woo Sohn, The Pennsylvania State University, U.S.A.

Wenting Tu, Department of Computer Science and Technology, East China Normal University, China

Sylvain Videau, IRIT, France

Perukrishnen Vytelingum, University of Southampton, U.K.

Zhijie Xu, East China Normal University, China

SELECTED PAPERS BOOK

A number of selected papers presented at ICAART 2010 will be published by Springer-Verlag in a CCIS Series book. This selection will be done by the Conference Co-chairs and Program Chair, among the papers actually presented at the conference, based on a rigorous review by the ICAART 2010 Program Committee members.

FOREWORD

This book contains the proceedings of the 2nd International Conference on Agents and Artificial Intelligence (ICAART 2010) which was organized by the Institute for Systems and Technologies of Information, Control and Communication (INSTICC). ICAART 2010 was held in cooperation with the Association for the Advancement of Artificial Intelligence (AAAI), the Portuguese Association for Artificial Intelligence (APPIA), the Spanish Association of Artificial Intelligence (AEPIA), the Workflow Management Coalition (WfMC) and the Association for Computing Machinery (ACM SIGART).

The Conference Program includes oral presentations (full papers and short papers) and posters, organized in two simultaneous tracks: “Artificial Intelligence” and “Agents”. We are proud to inform that the program includes also six plenary keynote lectures, given by internationally distinguished researchers, namely – Yves Demazeau (Laboratoire d’Informatique de Grenoble), Tim Finin (University of Maryland), Leonid Perlovsky (Harvard University), Vicent J. Botti i Navarro (Universidad Polit cnica de Valencia), Peter D. Karp (AI Center at SRI International) and Amilcar Cardoso (University of Coimbra). The meeting is complemented with a Special Session on Computing Languages with Multi-Agent Systems and Bio-Inspired Devices.

ICAART received 364 paper submissions from 58 countries, in all continents. To evaluate each submission, a double blind paper review was performed by the Program Committee, whose members are highly qualified researchers in ICAART topic areas. Based on the classifications provided, only 165 papers were selected to be published in these proceedings and presented at the conference. Of these, 96 papers were selected for oral presentation (31 full papers and 65 short papers) and 69 papers were selected for poster presentation. The full paper acceptance ratio was 9%, and the oral acceptance ratio (including full papers and short papers) was 26%. This strict acceptance ratio shows the intention to preserve a high quality forum which we expect to develop further next year. A short list of presented papers will be selected so that revised and extended versions of these papers will be published by Springer-Verlag in a CCIS Series book with the best papers of ICAART 2010.

Conferences are also meeting places where collaboration projects can emerge from social contacts amongst the participants. Therefore, in order to promote the development of research and professional networks the Conference includes in its social program a Conference Social Event & Banquet in the evening of January 23 (Saturday).

We would like to express our thanks to all participants. First of all to the authors, whose quality work is the essence of this conference; secondly to all members of the Program Committee and auxiliary reviewers, who helped us with their expertise and valuable time. We would also like to deeply thank the invited speakers for their excellent contribution in sharing their knowledge and vision. Finally, a word of appreciation for the hard work of the secretariat: organizing a conference of this level is a task that can only be achieved by the collaborative effort of a dedicated and highly capable team.

The organization will distribute four paper awards at the conference closing session, two for the Agents track and two for the Artificial Intelligence track: each track will have a best paper award and the best student paper award. The decision is mainly based on the paper classifications provided by the Program Committee and the paper presentation at the conference.

We wish you all an exciting conference and an unforgettable stay in the lovely city of Valencia. We hope to meet you again next year for the 3rd ICAART, details of which will soon be available at <http://www.icaart.org>.

Joaquim Filipe

Polytechnic Institute of Setúbal / INSTICC, Portugal

Ana Fred

Technical University of Lisbon / IT, Portugal

Bernadette Sharp

Staffordshire University, U.K.

CONTENTS

INVITED SPEAKERS

KEYNOTE SPEAKERS

PURPOSIVE MULTI-AGENT SYSTEMS <i>Yves Demazeau</i>	IS-5
CREATING AND EXPLOITING A WEB OF SEMANTIC DATA <i>Tim Finin</i>	IS-7
COGNITIVE EVOLUTION OF CULTURES <i>Leonid Perlovsky</i>	IS-19
AGENTS AND AGREEMENT TECHNOLOGIES - The Next Generation of Information Distributed Systems <i>Vicent J. Botti i Navarro</i>	IS-21
DEVELOPMENT OF LARGE SCIENTIFIC KNOWLEDGE BASES <i>Peter D. Karp</i>	IS-23
COMPUTATIONAL CREATIVITY - Progress and Prospects <i>Amilcar Cardoso</i>	IS-25

ARTIFICIAL INTELLIGENCE

FULL PAPERS

FINDING DISTANCE-BASED OUTLIERS IN SUBSPACES THROUGH BOTH POSITIVE AND NEGATIVE EXAMPLES <i>Fabio Fassetti and Fabrizio Angiulli</i>	5
TOWARDS A DISCOURSE LEVEL COHERENCE STRUCTURE <i>Parma Nand and Wai Yeap</i>	11
XQUAKE - An XQuery-like Language for Mining XML Data <i>Andrea Romei and Franco Turini</i>	20
THE (PROBABILISTIC) LOGICAL CONTENT OF CADIAG2 - Rule-based Probabilistic Approach <i>David Picado Muiño</i>	28
A GENERIC SOLUTION TO MULTI-ARMED BERNOULLI BANDIT PROBLEMS BASED ON RANDOM SAMPLING FROM SIBLING CONJUGATE PRIORS <i>Thomas Norheim, Terje Bråddland, Ole-Christoffer Granmo and B. John Oommen</i>	36
ON USING SIMULATION AND STOCHASTIC LEARNING FOR PATTERN RECOGNITION WHEN TRAINING DATA IS UNAVAILABLE - The Case of Disease Outbreak <i>Dragos Calitoiu and B. John Oommen</i>	45
ADABOOST BASED DOOR DETECTION FOR MOBILE ROBOTS <i>Jens Hensler, Michael Blaich and Oliver Bittel</i>	53
SPCD - SPATIAL COLOR DISTRIBUTION DESCRIPTOR - A Fuzzy Rule based Compact Composite Descriptor Appropriate for Hand Drawn Color Sketches Retrieval <i>Savvas A. Chatzichristofis, Yiannis S. Boutalis and Mathias Lux</i>	58

A CAUTIOUS APPROACH TO GENERALIZATION IN REINFORCEMENT LEARNING <i>Raphael Fonteneau, Susan A. Murphy, Louis Wehenkel and Damien Ernst</i>	64
A GENERAL DIALOGUE MANAGEMENT MODEL FOR DYNAMIC-DOMAIN EXPERT SYSTEMS WITH NATURAL LANGUAGE INTERFACES <i>Justyna Walkowska</i>	74
SELECTING GENES FROM GENE EXPRESSION DATA BY USING AN ENHANCEMENT OF BINARY PARTICLE SWARM OPTIMIZATION FOR CANCER CLASSIFICATION <i>Mohd Saberi Mohamad, Sigeru Omatu, Michifumi Yoshioka and Safaai Deris</i>	82
EPIAL - An Epigenetic Approach for an Artificial Life Model <i>Jorge Sousa and Ernesto Costa</i>	90
A PROCESS FOR COTS-SELECTION AND MISMATCHES HANDLING - A Goal-driven Approach <i>Sodany Kiv, Yves Wautelet and Manuel Kolp</i>	98
CHANGING TOPICS OF DIALOGUE FOR NATURAL MIXED-INITIATIVE INTERACTION OF CONVERSATIONAL AGENT BASED ON HUMAN COGNITION AND MEMORY <i>Sungsoo Lim, Keunhyun Oh and Sung-bae Cho</i>	107
A CONCEPTUAL STUDY OF MODEL SELECTION IN CLASSIFICATION - Multiple Local Models vs One Global Model <i>R. Vilalta, F. Ocegueda-Hernandez and C. Bagaria</i>	113
A REAL-TIME HYBRID METHOD FOR PEOPLE COUNTING SYSTEM IN A MULTI-STATE ENVIRONMENT <i>Ali Rezaee, Hojjat Bagherzadeh, Vahid Abrishami and Hamid Abrishami</i>	119
COMBINING RUNTIME DIAGNOSIS AND AI-PLANNING IN A MOBILE AUTONOMOUS ROBOT TO ACHIEVE A GRACEFUL DEGRADATION AFTER SOFTWARE FAILURES <i>Jörg Weber and Franz Wotawa</i>	127
GENETIC ALGORITHM FOR CLUSTERING TEMPORAL DATA - Application to the Detection of Stress from ECG Signals <i>Liliana A. S. Medina and Ana L. N. Fred</i>	135
SHORT PAPERS	
PREDICTION OF SURFACE ROUGHNESS IN TURNING USING ORTHOGONAL MATRIX EXPERIMENT AND NEURAL NETWORKS <i>John Kechagias, Vassilis Iakovakis, George Petropoulos, Stergios Maropoulos and Stefanos Karagiannis</i>	145
INVERSION FUNCTION OF MDS FOR SENTENCES ANALYSIS <i>Erqing Xu</i>	151
EFFICIENT IMAGE REDUCTION FOR FAST INTELLIGIBLE CLASSIFICATION <i>Marc Joliveau</i>	157
A CONVERSATIONAL EXPERT SYSTEM SUPPORTING BULLYING AND HARASSMENT POLICIES <i>Annabel Latham, Keeley Crockett and Zuhair Bandar</i>	163
DETECTION OF DISCRIMINATING RULES <i>Fabrizio Angiulli, Fabio Fassetti, Luigi Palopoli and Domenico Trimboli</i>	169

MULTI-AGENT VOTING FOR CONFLICT RESOLUTION - A Fuzzy Approach <i>Miklos Nagy and Maria Vargas-Vera</i>	178
POSSIBILISTIC ACTIVITY RECOGNITION <i>Patrice C. Roy, Bruno Bouchard, Abdenour Bouzouane and Sylvain Giroux</i>	184
B-CUBE MODEL IN AUTOMATED FUNCTIONAL DESIGN <i>Vicente Chulvi and Rosario Vidal</i>	190
A GENERIC APPROACH FOR SPARSE PATH PROBLEMS <i>Marc Pouly</i>	197
EXPLOITING SIMILARITY INFORMATION IN REINFORCEMENT LEARNING - Similarity Models for Multi-Armed Bandits and MDPs <i>Ronald Ortner</i>	203
LEARNING AND PREDICTION BASED ON A RELATIONAL HIDDEN MARKOV MODEL <i>Carsten Elfers and Thomas Wagner</i>	211
DOCUMENTS REPRESENTATION BASED ON INDEPENDENT COMPRESSIBILITY FEATURE SPACE <i>Nuo Zhang and Toshinori Watanabe</i>	217
ROBUST METHODS FOR ROBOT LOCALIZATION UNDER CHANGING ILLUMINATION CONDITIONS - Comparison of Different Filtering Techniques <i>Lorenzo Fernández Rojo, Luis Payá, Oscar Reinoso, Arturo Gil and Miguel Juliá</i>	223
DETECTION OF DISTRIBUTED ATTACKS IN MOBILE AD-HOC NETWORKS USING SELF-ORGANIZING TEMPORAL NEURAL NETWORKS <i>James Cannady</i>	229
ON REDUCING DIMENSIONALITY OF DISSIMILARITY MATRICES FOR OPTIMIZING DBC - An Experimental Comparison <i>Sang-Woon Kim</i>	235
MULTIAGENT COORDINATION IN AD-HOC NETWORKS BASED ON COALITION FORMATION <i>Samir Aknine, Usama Mir and Luciana Bezerra Arantes</i>	241
AFFECTIVE BLOG ANALYZER - What People Feel to <i>Masato Tokuhisa, Jin'ichi Murakami and Satrou Ikehara</i>	247
NLP AND ONTOLOGY MATCHING - A Successful Combination for Trialological Learning <i>Angela Locoro, Viviana Mascardi and Anna Marina Scapolla</i>	253
COMPLEXITY OF STOCHASTIC BRANCH AND BOUND METHODS FOR BELIEF TREE SEARCH IN BAYESIAN REINFORCEMENT LEARNING <i>Christos Dimitrakakis</i>	259
IMPROVING THE PERFORMANCE OF CODEQ USING QUADRATIC INTERPOLATION <i>Mahamed G. H. Omran and Ayed Salman</i>	265
STOCHASTIC GPU-BASED MULTITHREAD IMPLEMENTATION OF MULTIPLE BACK-PROPAGATION <i>Noel Lopes and Bernardete Ribeiro</i>	271
A NEW REPRESENTATION AND PLANNER FOR COMPUTER BATCH JOB SCHEDULING, EXECUTION MONITORING, PROBLEM DIAGNOSIS AND CORRECTION <i>Tracey Lall</i>	277

AN AGENT-BASED INFORMATION CUSTOMIZATION SYSTEM USING CBR AND ONTOLOGY	285
<i>Hyun Jung Lee and Mye M. Sohn</i>	
SHAPE PRIOR SEGMENTATION OF MEDICAL IMAGES USING PARTICLE SWARM OPTIMIZATION	291
<i>Ahmed Afifi, Toshiya Nakaguchi and Norimichi Tsumura</i>	
INTEGRATING REASONING ABOUT ACTIONS AND BAYESIAN NETWORKS	298
<i>Yves Martin and Michael Thielscher</i>	
A KNOWLEDGE-BASED SYSTEM FOR THE VALIDATION OF THE DEPLOYMENT OF SOFTWARE UNITS	305
<i>Fco. Javier Blanco, Laura Díaz-Casillas and Mercedes Garijo</i>	
PREDICTING USER ACTIVITIES IN THE SEQUENCE OF MOBILE CONTEXT FOR AMBIENT INTELLIGENCE ENVIRONMENT USING DYNAMIC BAYESIAN NETWORK	311
<i>Han-Saem Park and Sung-bae Cho</i>	
RESEARCH ON THE BAYESIAN LEARNING MODEL FOR SELECTING ARGUMENTS ON ARGUMENTATION-BASED NEGOTIATION OF AGENT	317
<i>Guorui Jiang, Xiaoyu Hu and Xiuzhen Feng</i>	
A NICHED PARETO GENETIC ALGORITHM - For Multiple Sequence Alignment Optimization	323
<i>Fernando José Mateus da Silva, Juan Manuel Sánchez Pérez, Juan Antonio Gómez Pulido and Miguel A. Vega Rodríguez</i>	
DIALOGUE-BASED MANAGEMENT OF USER FEEDBACK IN AN AUTONOMOUS PREFERENCE LEARNING SYSTEM	330
<i>Juan Manuel Lucas-Cuesta, Javier Ferreiros, Asier Aztiria, Juan Carlos Augusto and Michael McTear</i>	
HANDLING DYNAMIC MULTIOBJECTIVE PROBLEMS WITH PARTICLE SWARM OPTIMIZATION	337
<i>Alan Díaz Manríquez, Gregorio Toscano Pulido and José Gabriel Ramírez-Torres</i>	
AN ONLINE SPEAKER TRACKING SYSTEM FOR AMBIENT INTELLIGENCE ENVIRONMENTS	343
<i>Maidor Zamalloa, Mikel Penagarikano, Luis Javier Rodríguez-Fuentes, Germán Bordel and Juan Pedro Uribe</i>	
A NON-PARAMETERISED HIERARCHICAL POLE-BASED CLUSTERING ALGORITHM (HPOBC)	350
<i>Amparo Albalade, Steffen Rhinow and David Suendermann</i>	
INTERPRETING STRUCTURES IN MAN-MADE SCENES - Combining Low-Level and High-Level Structure Sources	357
<i>Kasim Terzić, Lothar Hotz and Jan Šochman</i>	
ROSE – AN INTELLIGENT MOBILE ASSISTANT - Discovering Preferred Events and Finding Comfortable Transportation Links	365
<i>Bjørn Zenker and Bernd Ludwig</i>	
PEDAGOGICAL SYSTEM IN VIRTUAL ENVIRONMENTS FOR HIGH-RISK SITES	371
<i>Kahina Amokrane and Domitile Lourdeaux</i>	
EXTRACTING CASE-BASED ANSWERS FROM CLOSED PROOF-TREES	377
<i>Isabel Gomes Barbosa and Newton José Vieira</i>	

MOVIE RECOMMENDATION WITH K-MEANS CLUSTERING AND SELF-ORGANIZING MAP METHODS <i>Eugene Seo and Ho-Jin Choi</i>	385
INTELLIGENT VISION FOR MOBILE AGENTS - Contour Maps in Real Time <i>Tariq Khan, John Morris and Khurram Jawed</i>	391
INFORMATION UNCERTAINTY TO COMPARE QUALITATIVE REASONING SECURITY RISK ASSESSMENT RESULTS <i>Gregory M. Chavez, Brian P. Key, David K. Zerkle and Daniel W. Shevitz</i>	398
WHERE ARE YOU FROM? - Tell me HOW you Write and I Will Tell you WHO you Are <i>Marta R. Costa-jussà, Rafael E. Banchs and Joan Codina</i>	406
A MOLECULAR CONCEPT OF MANAGING DATA <i>Christoph Schommer</i>	411
LSVF: LEAST SUGGESTED VALUE FIRST - A New Search Heuristic to Reduce the Amount of Backtracking Calls in CSP <i>Cleyton Mário de Oliveira Rodrigues, Eric Rommel Dantas Galvão, Ryan Ribeiro de Azevedo and Marcos Aurélio Almeida da Silva</i>	416
ACHIEVING ROBUSTNESS IN ADAPTIVE SYSTEMS - Can Hierarchies Help? <i>Dragana Laketic and Gunnar Tufte</i>	422
DISCOVERING N-ARY TIMED RELATIONS FROM SEQUENCES <i>Nabil Benayadi and Marc Le Goc</i>	428
THE ROLE OF SEQUENCES FOR INCREMENTAL LEARNING <i>Susanne Wenzel and Lothar Hotz</i>	434
POSTERS	
EVOLVING ROBUST ROBOT CONTROLLERS FOR CORRIDOR FOLLOWING USING GENETIC PROGRAMMING <i>Bart Wyns, Bert Bonte and Luc Boullart</i>	443
A TREE LEARNING APPROACH TO WEB DOCUMENT SECTIONAL HIERARCHY EXTRACTION <i>F. Canan Pembe and Tunga Güngör</i>	447
FINGERPRINT IDENTIFICATION - A Support Vector Machine Approach <i>Terje Kristensen</i>	451
ORGANIZING AND PLANNING THE ASIC DESIGN PROCESS BY MEANS OF A MULTI-AGENT SYSTEM <i>Jana Blaschke, Christian Sebeke and Wolfgang Rosenstiel</i>	459
PARACONSISTENT NEGATION AND CLASSICAL NEGATION IN COMPUTATION TREE LOGIC <i>Norihiro Kamide and Ken Kaneiwa</i>	464
CONTROL MODEL OF DOMOTIC SYSTEMS BASED ON ONTOLOGIES <i>Pablo A. Valiente-Rocha and Adolfo Lozano-Tello</i>	470
COLLECTING KNOWLEDGE AND LEARNING LANGUAGES WITH TOWERS OF KNOWLEDGE GAME <i>Dilyana Valkova Budakova, Mariyana Ivanova Ilieva and Lyudmil Georgiev Dakovski</i>	474

RESEARCH AND DEVELOPMENT OF CONSCIOUS ROBOT - Mirror Image Cognition Experiments using Small Robots <i>Takashi Komatsu and Junichi Takeno</i>	479
OPINION POLARITY DETECTION - Using Word Sense Disambiguation to Determine the Polarity of Opinions <i>Tamara Martín-Wanton, Aurora Pons-Porrata, Andrés Montoyo-Guijarro and Alexandra Balahur</i>	483
THE SOLUTION OF DISCRETE CONSTRAINT PROBLEMS USING BOOLEAN MODELS - The Use of Ternary Vectors for Parallel SAT-Solving <i>Christian Posthoff and Bernd Steinbach</i>	487
INTEGRATING LOGICAL AND SUB-SYMBOLIC CONTEXTS OF REASONING <i>Tarek Besold and Stefan Mandl</i>	494
A STUDY OF A CONSCIOUS ROBOT - An Attempt to Perceive the Unknown <i>Soichiro Akimoto and Junichi Takeno</i>	498
TOWARDS E-CONVIVIALITY IN WEB-BASED SYSTEMS <i>Sascha Kaufmann and Christoph Schommer</i>	502
AN EFFICIENT ALGORITHM TO ESTIMATE REAL-TIME TRAFFIC INFORMATION BASED ON MULTIPLE DATA SOURCES <i>Du Bowen, Liang Yun, Ma Dianfu, Lv Weifeng and Zhu Tongyu</i>	507
MAXIMUM TOLERANCE AND MAXIMUM GREATEST TOLERANCE - Weights and Threshold of Strict Separating Systems <i>J. Freixas and X. Molinero</i>	511
ENHANCING LOCAL-SEARCH BASED SAT SOLVERS WITH LEARNING CAPABILITY <i>Ole-Christoffer Granmo and Nouredine Bouhmala</i>	515
BRANCHING-TIME VERSUS LINEAR-TIME - A Cooperative and Feasible Approach <i>Norihiro Kamide</i>	522
NEW METHOD USING DECLINABLE WORDS AND CONCURRENT WORDS TO CREATE A LARGE NUMBER OF FA WORDS <i>El-Sayed Atlam, K. Morita, M. Fuketa and Jun-ichi Aoe</i>	527
A MULTI RESOLUTION FORECASTING METHOD FOR SHORT LENGTH TIME SERIES DATA USING NEURAL NETWORKS <i>S. Arash Sheikholeslam and Pouya Bidram</i>	532
REASONING ABOUT BOUNDED TIME DOMAIN - An Alternative to NP-Complete Fragments of LTL <i>Norihiro Kamide</i>	536
RULE BASED MODELLING OF IMAGES SEMANTIC CONCEPTS <i>Stefan Udristoiu, Anca Ion and Dan Mancas</i>	540
A MULTI-AGENT MPC ARCHITECTURE FOR DISTRIBUTED LARGE SCALE SYSTEMS <i>Valeria Javalera, Bernardo Morcego and Vicenç Puig</i>	544
PREDICTING TRAFFIC FLOW IN ROAD NETWORKS - Using Bayesian Networks with Data from an Optimal Plate Scanning Device Location <i>S. Sánchez-Cambronero, A. Rivas, I. Gallego and J. M. Menéndez</i>	552
THE OBSERVABILITY PROBLEM IN TRAFFIC MODELS - An Algebraic Step by Step Method <i>Pilar Jiménez, Santos Sánchez-Cambronero, Inmaculada Gallego and Ana Rivas</i>	560

IMPROVING AIRCRAFT MAINTENANCE WITH INNOVATIVE PROGNOSTICS AND HEALTH MANAGEMENT TECHNIQUES - Case of Study: Brake Wear Degradation <i>Susana Ferreira and Aitor Arnaiz</i>	568
MICROSERVICES - Lightweight Service Descriptions for REST Architectural Style <i>José Ignacio Fernández-Villamor, Carlos Á. Iglesias and Mercedes Garijo</i>	576
NEURAL NETWORKS FOR THE MODELING OF CONCENTRATION OF CHEMICALS <i>José Torrecilla</i>	580
INTEGRATING POINTING GESTURES INTO A SPANISH-SPOKEN DIALOG SYSTEM FOR CONVERSATIONAL SERVICE ROBOTS <i>Héctor Avilés, Iván Meza, Wendy Aguilar and Luis Pineda</i>	585
HOW TO LEARN A LEARNING SYSTEM - Automatic Decomposition of a Multiclass Task with Probability Estimates <i>Cristina García Cifuentes and Marc Sturzel</i>	589
DIGITAL RECORDING OF TV BROADCASTING AND ADVERTISEMENT DETECTION <i>Francisco Ortiz and Alberto Gómez</i>	595
CAPTURING USER'S PREFERENCES USING A GENETIC ALGORITHM - Determining Essential and Dispensable Item Attributes <i>S. Valero, E. Argente and V. Botti</i>	599
AN AGENT-BASED OPTIMIZATION APPROACH FOR DISTRIBUTED PROJECT SCHEDULING IN SUPPLY CHAIN WITH PARTIAL INFORMATION SHARING <i>Hanlin Zhang, Guorui Jiang and Tiyun Huang</i>	603
A REINFORCEMENT LEARNING APPROACH FOR MULTIAGENT NAVIGATION <i>Francisco Martinez-Gil, Fernando Barber, Miguel Lozano, Francisco Grimaldo and Fernando Fernandez</i>	607
USING LIGHTWEIGHT KNOWLEDGE MODELLING TO IMPROVE PROACTIVE INFORMATION DELIVERY <i>Oleg Rostanin, Heiko Maus, Takeshi Suzuki and Kaoru Maeda</i>	611
PREDICTING BURSTING STRENGTH OF PLAIN KNITTED FABRICS USING ANN <i>Pelin Gurkan Ünal, Mustafa Erdem Üreyen and Diren Mecit Arman</i>	615
RELATIONAL SEQUENCE BASED CLASSIFICATION IN MULTI-AGENT SYSTEMS <i>Grazia Bombini, Nicola Di Mauro, Stefano Ferilli and Floriana Esposito</i>	619
ON AMBIGUITY DETECTION AND POSTPROCESSING SCHEMES USING CLUSTER ENSEMBLES <i>Amparo Albalade, Aparna Suchindranath, Mehmet Muti Soenmez and David Suendermann</i>	623
EMOTIONAL FACIAL EXPRESSION RECOGNITION FROM TWO DIFFERENT FEATURE DOMAINS <i>Jonghwa Kim and Frank Jung</i>	631
TWO-POPULATION GENETIC ALGORITHM - An Approach to Improve the Population Diversity <i>M. Gestal, D. Rivero, E. Fernández, J. R. Rabuñal and J. Dorado</i>	635
SUMMARIZING AND VISUALIZING WEB PEOPLE SEARCH RESULTS <i>Harumi Murakami, Hiroshi Ueda, Shin'ichi Kataoka, Yuya Takamori and Shoji Tatsumi</i>	640
QUERY-BY-EMOTION SKETCH FOR LOCAL EMOTION-BASED IMAGE RETRIEVAL <i>Young-Chang Lee and Kyoung-Mi Lee</i>	644

NEW RESEARCH LINES FOR MAX-SAT - Exploiting the Recent Resolution Rule for Max-SAT <i>Federico Heras</i>	648
ARABIC WORD SENSE DISAMBIGUATION <i>Laroussi Merhbene, Anis Zouaghi and Mounir Zrigui</i>	652
SOUND SUMMARIZATIONS FOR ALCHI ONTOLOGIES - How to Speedup Instance Checking and Instance Retrieval <i>Sebastian Wandelt and Ralf Möller</i>	656
THE INTELLIGENT WEB <i>F. Javier del Álamo, Raquel Martínez and José Alberto Jaén</i>	662
INTEGRATING CASE BASED REASONING AND EXPLANATION BASED LEARNING IN AN APPRENTICE AGENT <i>Lei Wang, Tetsuo Sawaragi, Yajie Tian and Yukio Horiguchi</i>	667
AUTHOR INDEX	671

ROBUST METHODS FOR ROBOT LOCALIZATION UNDER CHANGING ILLUMINATION CONDITIONS

Comparison of Different Filtering Techniques

Lorenzo Fernández Rojo, Luis Payá, Oscar Reinoso, Arturo Gil and Miguel Juliá
Departamento de Ingeniería de Sistemas Industriales, Miguel Hernández University
Avda. de la Universidad s/n. 03202, Elche (Alicante), Spain
l.fernandez@umh.es, lpaya@umh.es

Keywords: Omnidirectional vision, Robot mapping, Appearance-based methods, Robust localization and illumination effects filtering.

Abstract: The use of omnidirectional systems provides us with rich visual information that allows us to create appearance-based dense maps. This map can be composed of several panoramic images taken from different positions in the environment. When the map contains only visual information, it will depend heavily on the conditions of the environment lighting. Therefore we get different visual information depending on the time of day when the map is created, the state of artificial lighting in the environment, or any other circumstance that causes a change in the illumination of the scene. To obtain a robust map against changes in the illumination of the environment we apply different filters on the panoramic images. After that, we use some compression methods that allow us to reduce the amount of information stored. We have conducted a comprehensive experimentation to study which type of filter best adapts to changing lighting conditions.

1 INTRODUCTION

When a robot or a team of robots have to carry out a task in a given environment, in most cases, an internal representation is required to allow the robot to estimate its initial position and orientation, and navigate to the target points. Omnidirectional vision systems are commonly used at this kind of applications due to their low cost and the amount of information they provide. When working in unstructured environments where the creation of appropriate models of recognition can be an arduous chore, it is useful to use appearance-based approaches that offer a systematic and intuitive way to construct the map. The main problem such approaches present is the high computational cost because they do not extract relevant information from images, using the image as a whole.

To alleviate the high computational cost, several researchers have shown how it is possible to use a representation of the environment in a lower order subspace, using compression techniques. A widely extended method is PCA (Principal Components Analysis). One example is the database created in (Kröse, Bunschoten, Hagen, Terwijn and Vlassis, 2004). Uenoara and Kanade (1998) studied the

problem of rotation in the plane in which the robot moves, using a set of rotated images. Jogan and Leonardis (2000) applied these concepts to an appearance-based map of an environment. Other related works (Menegatti, Maeda and Ishiguro, 2004) defined the concept of Fourier Signature and (Rossi, Ranganathan, Dellaert and Menegatti, 2008) used the Spherical Fourier Transform of omnidirectional images, using the Discrete Fourier Transform to compress the information. Appearance-based techniques constitute a basis framework to other robotics applications, as in route-following, as Payá, Reinoso, Gil and Sogorb (2008) show.

The appearance of an image will depend, in general, on the appearance of the objects that appear on it. Adini, Moses and Ullman (1997) show the influence of the illumination of the scene in a process of facial recognition. An individual cannot be recognized if there is a substantial change of lighting in the scene. Murase and Nayar (1994) use an appearance-based approach to avoid the problems of illumination variation. With this aim many views of the object are generated under different lighting conditions. Faraid and Adelson (1999) show that it is possible to separate the effects of reflections and

illumination using ICA (Independent Component Analysis). Other researchers (Bischof, Wildenauer and Leonardis, 2004) have shown how to mitigate the effects of lighting on the appearance of an object, using gradient filter banks. The approach consists in implementing a series of filters before building the linear subspace using PCA. Other works (De Araújo, Maia, D'Angelo and D'Angelo, 2006) make use of homomorphic filters banks to separate the components of luminance and reflectance. This way it is possible to filter these components separately, reducing significantly the dependence of image appearance with respect to changes in lighting.

In this paper we present a methodology to build an appearance-based dense map. Several kinds of filters and compression techniques have been tested to make the map robust against changes in lighting conditions.

The work is structured as follows. Section 2 introduces some filtering techniques to eliminate the dependence on changes in the lighting. Section 3 presents some compression techniques to reduce the computational cost. In section 4 the method to build the map and how to obtain the position of the robot is detailed. We show the results of experiments carried out in section 5. Finally, in section 6, we present the conclusions of the work.

2 FILTERING TECHNIQUES USING PANORAMIC IMAGES

The appearance of an object in an image can vary strongly depending on the kind and level of illumination of the scene. When we work with the appearance of panoramic images, it is necessary to take into account the fact that appearance is influenced both by the position and shape of the objects and the lighting conditions. It is therefore necessary to implement a mechanism that allows us to work independently of the lighting conditions of the environment.

Several researchers have studied how to get invariance with respect to the illumination of the scene in object recognition tasks. We have separated the different methods in two fields. The first one is related to the application of a bank of gradient (first derivative) or Laplacian (second derivative) filters. The second one consists in performing a homomorphic filtering of the image separating the luminance from the reflectance component.

2.1 Edge Detector

The main advantage of using a representation of the image edges resides mainly in the fact that we obtain a compact representation and that, in most cases, it is insensitive to changes in the lighting on the objects of the image.

An edge detection filtering can be carried out through the Prewitt gradient filter, based on the estimation of the modulus of the gradient using two masks of size 3x3 (h_1 in the x-axis and h_2 in the y-axis):

$$h_1 = \begin{bmatrix} -1 & -1 & -1 \\ 0 & 0 & 0 \\ 1 & 1 & 1 \end{bmatrix} \quad h_2 = \begin{bmatrix} -1 & 0 & 1 \\ -1 & 0 & 1 \\ -1 & 0 & 1 \end{bmatrix} \quad (1)$$

An evolution of the Prewitt Filter is the Sobel filter that, apart from estimating the value of the modulus of the gradient, produces a smoothing of the image that may be beneficial, taking into account the noisy behaviour that the estimations based on the derivation of the image may present:

$$h_1 = \begin{bmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{bmatrix} \quad h_2 = \begin{bmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{bmatrix} \quad (2)$$

Another method for detecting edges is the Laplacian of Gaussian operator, which combines the effect of a Gaussian smoothing with the improvement in the location of the edge (cross of 0 for the second derivative). In this case it is only necessary to apply a mask:

$$h_2 = \begin{bmatrix} 1 & -2 & 1 \\ -2 & 4 & -2 \\ 1 & -2 & 1 \end{bmatrix} \quad (3)$$

2.2 Homomorphic Filter

The Homomorphic filter can separate the components of luminance and reflectance of an image (Gonzalez and Woods, 1993). Thus it is possible to build a filter for each component separately, allowing us to control the contribution of each component on the image appearance. It is possible to separate the luminance from the reflectance component by applying the Neperian logarithm operator on the image:

$$\begin{aligned} f(x, y) &= i(x, y) \times r(x, y) \\ z(x, y) &= \ln(f(x, y)) \\ z(x, y) &= \ln(i(x, y)) + \ln(r(x, y)) \end{aligned} \quad (4)$$

Once the components are separated, the 2D Discrete Fourier Transform is computed. It is at this point that we can filter the image in the frequency domain:

$$\begin{aligned}\mathfrak{I}(z(x,y)) &= \mathfrak{I}(\ln(i(x,y))) + \mathfrak{I}(\ln(r(x,y))) \\ \mathfrak{I}(z'(x,y)) &= \mathfrak{I}(z(x,y)) \cdot H(u,v)\end{aligned}\quad (5)$$

It will be necessary to perform the inverse process to obtain the filtered image in the spatial domain.

The low frequency components are associated with the illumination of the image and the high frequency ones with the reflectance of the image. So, to reduce the effects of changes in the illumination of the image, a high pass filter could be applied. We build this high pass filter from a low pass one in the next way:

$$\begin{aligned}H'_{hp}(u,v) &= 1 - H_{lp}(u,v) \\ H_{hp}(u,v) &= (\alpha_h - \alpha_l) \cdot H'_{hp}(u,v) + \alpha_l\end{aligned}\quad (6)$$

We have used two families of filters, Butterworth and Gaussian. Fig. 1 shows the Homomorphic Filter Transfer Function from a Butterworth filter. The transfer functions are as follows:

$$\begin{aligned}D(u,v) &= (u^2 + v^2)^{1/2} \\ H_{Butt}(u,v) &= \frac{1}{1 + \left[\frac{D(u,v)}{D_0} \right]^{2n}} \\ H_{Gauss}(u,v) &= \exp\left(-\left[\frac{D(u,v)}{D_0} \right]^2\right)\end{aligned}\quad (7)$$

3 COMPRESSION TECHNIQUES USING PANORAMIC IMAGES

The map created is composed of a set of panoramic images of the environment. To reduce the computational cost, it is necessary to extract the most relevant information from the set of panoramic images. In this section, some techniques that allow us to obtain this information are outlined.

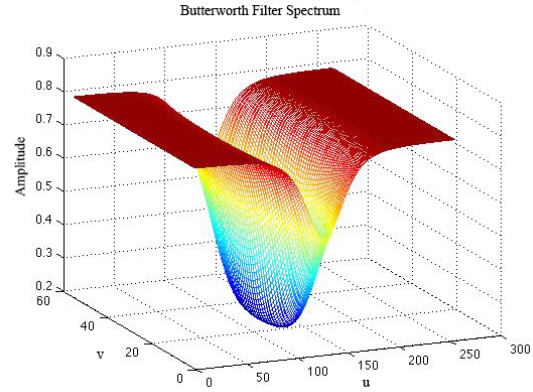


Figure 1: Transfer Function of Homomorphic Filter with Butterworth Filter.

3.1 PCA-based Techniques

As (Kirby, 2000) shows, it is possible to transform each image from a set of N images with M pixels each, $\vec{x}^j \in \mathbb{R}^{M \times 1}; j=1 \dots N$, into a vector with the K PCA features that contain the most relevant information, $\vec{p}^j \in \mathbb{R}^{K \times 1}; j=1 \dots N$, $K \leq N$. However, when we build the database in this way, it only contains information about the direction that the robot had when each image was captured, but not for all the possible orientations. Jogan and Leonardis (2000) present a method to include this orientation information, with the uniqueness that it is only necessary to acquire an image per position, and Payá, Fernández, Reinoso, Gil and Úbeda (2009) make use of it in a robot localization task, comparing to other techniques.

In brief, to construct the covariance matrix C , we obtain Q rotations from each image of the map. As we work with panoramic images, the covariance matrix of our data matrix $\mathbf{X} \in \mathbb{R}^{M \times (Q \times N)}$, shall consist of a set of N blocks of size $Q \times Q$:

$$\begin{aligned}\mathbf{X} &= [\mathbf{x}^1 | \mathbf{x}^2 | \dots | \mathbf{x}^N] \\ \Rightarrow C = \mathbf{X}^T \mathbf{X} &= \begin{bmatrix} X^{11} & X^{12} & \dots & X^{1N} \\ X^{21} & X^{22} & \dots & X^{2N} \\ \vdots & \vdots & \ddots & \vdots \\ X^{N1} & X^{N2} & \dots & X^{NN} \end{bmatrix}\end{aligned}\quad (8)$$

The covariance matrix is composed of circulant blocks. This fact allows us to perform the SVD decomposition of C through Q decompositions of order N , thus reducing the computational cost of the compression.

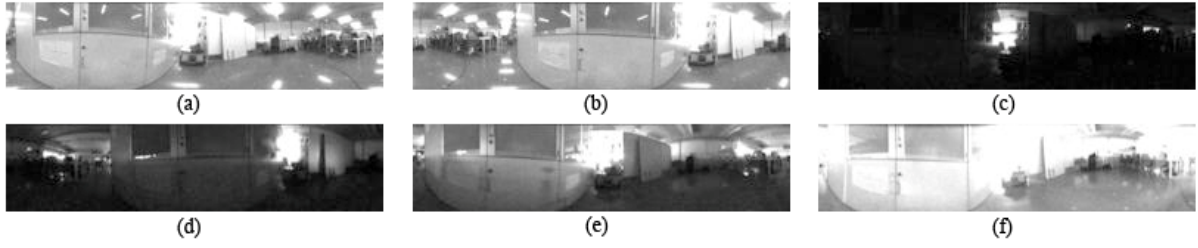


Figure 2: Sets of test images. (a) Test 1 (9:00, artificial light), (b) Test 2 (9:00, artificial light, 90 degrees rotation), (c) Test 3 (18:00, no light), (d) Test 4 (11:00, natural light, 90 degrees rotation), (e) Test 5 (13:00, daylight) and (f) Test 6 (16:00, daylight).

3.2 Fourier-based Techniques

When we have an image $f(x,y)$ with N_y rows and N_x columns, we can obtain the relevant information of the image by applying the Discrete Fourier Transform. There are several possibilities, such as to implement the 2D Discrete Fourier Transform (Payá *et al*, 2009), (Rossi *et al*, 2008), the Spherical Fourier Transform of omnidirectional images or the Fourier Signature of the panoramic image (Menegatti *et al*, 2004).

The Fourier signature exploits better the invariance to ground-plane rotations in panoramic images. This transformation consists in expanding each row of the panoramic image $\{a_n\} = \{a_0, a_1, \dots, a_{N_y-1}\}$ using the Discrete Fourier Transform into the sequence of complex numbers $\{A_n\} = \{A_0, A_1, \dots, A_{N_y-1}\}$. The most important information is concentrated in the low frequency components of each row. It is possible to prove that if each row of the original image is represented by the sequence $\{a_n\}$ and each row of the rotated image by $\{a_{n-q}\}$ (being q the amount of shift), when the Fourier Transform of the shifted sequence is computed, we obtain the same amplitudes A_k than in the non-shifted sequence, and there is only a phase change, proportional to the amount of shift q (eq. 9).

$$\Im[\{a_{n-q}\}] = A_k e^{-j \cdot \frac{2\pi qk}{N_y}}; \quad k = 0, \dots, N_y - 1 \quad (9)$$

4 MAP BUILDING AND LOCALIZATION

In this section, we expose in general terms, how a dense map can be built, and how the location and orientation of the robot in it can be computed. (Payá

et al, 2009) evidence that use of the Fourier signature of the image clearly outperforms PCA both in time consumption and in localization accuracy. Therefore to create the map and retrieval of the location, we use only the Fourier Signature of the image.

4.1 Map Building

To perform the experiment, we have captured a set of 101 omnidirectional images on a predefined grid of 40x40 cm in an indoor environment. We work with panoramic images with a size of 56x256 pixels. Once we have all the panoramic images, we used the Fourier signature described in the previous section. To test the validity of the maps constructed, we have captured several test images in some half-way points among those stored in the map. We have captured several sets of test images with changing illumination conditions and changing the position of some objects (Fig. 2). Fig. 3 (a) shows a bird's eye view of the grid used to capture the images to construct the map and an example of panoramic images.

4.2 Localization and Orientation Recovering

The objective is to calculate the position and orientation of the robot in the points where the test images were taken, under different lighting conditions, using only the visual information stored in the map.

To calculate the position and orientation of the robot for each test image, we calculate the Fourier transform (using the Fourier signature) and then, we calculate the Euclidean distance of the power spectrum of the test image with respect to the spectra stored in the map. The corresponding position of the robot is extracted as the best matching. Furthermore, the orientation is calculated with eq. 9.

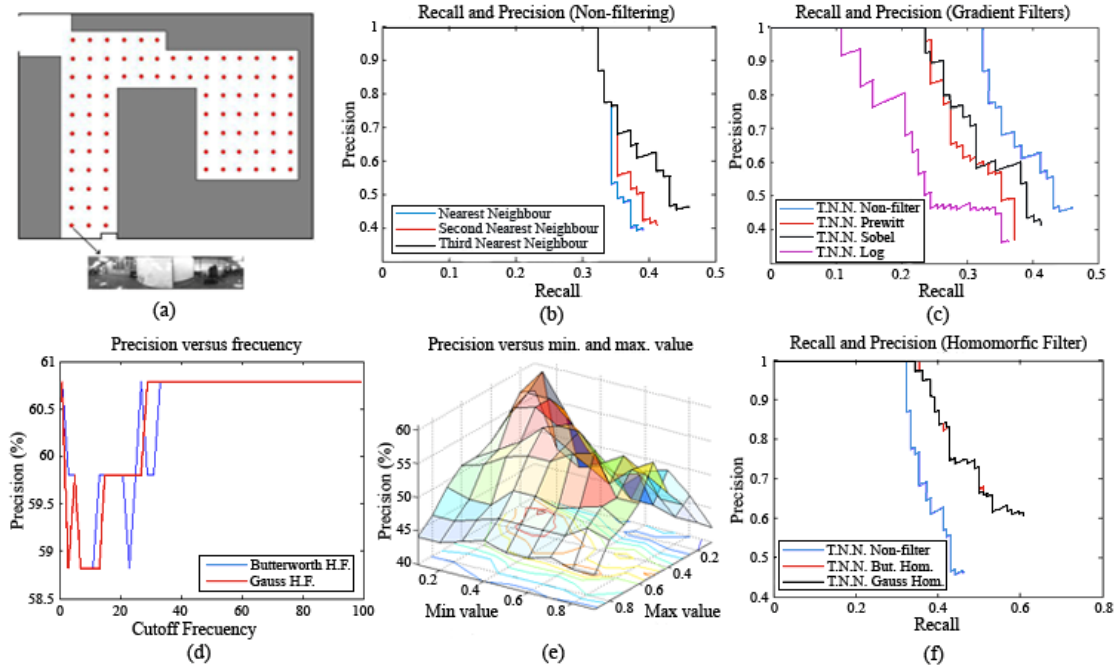


Figure 3: (a) Grid used to capture the set of training images, (b) Precision versus Recall localization without filtering, (c) Precision versus Recall localization using Gradient Filters, (d) Precision in terms of frequency of the filters, (e) Precision in terms of maximum and minimum value of the filter, (f) Precision versus Recall localization using Homomorphic Filters.

5 EXPERIMENTAL RESULTS

In this section the results obtained from experiments are presented. To perform the experiments, we have constructed the map by taking a total of 101 panoramic images. We have 6 sets with 17 test images each, taken at different times of day and under different conditions of illumination.

We will use *Recall and Precision* charts (Gil, Martinez, Ballesta and Reinoso, 2009) to compare the different methods of filtering. The parameters are defined as follows:

$$\begin{aligned} recall &= \frac{\#correct \ matches \ retrieved}{\#total \ correct \ matches} \\ precision &= \frac{\#correct \ matches \ retrieved}{\#matches \ retrieved} \end{aligned} \quad (10)$$

For the data association we use the minimum Euclidean distance, through the descriptors Nearest Neighbour (N.N.), Second Nearest Neighbour (S.N.N.) and Third Nearest Neighbour (T.N.N.). Fig. 3 (b) shows the results obtained when we perform a localization process without prior filtering. We can observe the improvement that occurs when we use the descriptor T.N.N.

In Fig. 3 (c) we can observe how worse results are obtained when we apply gradient-based filters. It reduces the accuracy from 46.08% (no filter) to 41.18% (Sobel), 37.25% (Prewitt), or, in the worst case to 36.27% (Laplacian).

When working with homomorphic filters the parameters of the filter need to be adjusted previously. The homomorphic filter built using a Butterworth filter depends mainly on the cut-off frequency, the order of the filter and the maximum and minimum value of the filter. When we build the filter from a Gaussian filter, the most important parameters are the cut-off frequency and maximum and minimum value of the filter. As we can see in Fig. 3 (d) and Fig. 3 (e), both filters are more dependent on the maximum and minimum values, than the cut-off frequency.

After exhaustive tests, the optimal values for the parameters are a cut-off frequency of 50 Hz, Butterworth filter of order 3, homomorphic filter maximum value equal to 0.21 and minimum value equal to 0.20. Fig. 3 (f) shows how we can improve the accuracy of the location within the map, applying a homomorphic filter to it. In this case we have passed from an accuracy of 46.08% (no filter) to an accuracy of 60.78% with the homomorphic

filter. We can see how the results obtained with the Gaussian filter are almost identical to those obtained using the Butterworth filter.

6 CONCLUSIONS

In this work, we have presented some methods for the creation of robust dense maps of real environments, using an appearance-based approach from previously filtered panoramic images.

We have presented two possible methods for filtering against illumination changes in the environment. As shown, the application of the first method (edge detection), not only does not improve but also worsens the results. On the other hand, applying a homomorphic filter on the panoramic image significantly improves the localization. Very similar results are obtained when constructing the homomorphic filter using a Gaussian filter or using a Butterworth filter. Furthermore, we have tuned the parameters of the filters to obtain a robust location against changes in illumination.

We have built the database by applying a compression of the visual information. We have used the Fourier signature due to the fact that it presents better results in terms of amount of memory and computation times needed to build the database. It is also important the fact that it presents orientation invariance and it allow us to compute the robot orientation. Finally, an important property is that the Fourier transform is an inherently incremental method. These properties make it possible to be applied in future works where robots have to add new information to the map and localize simultaneously in real time.

This work opens the door to the use of appearance-based methods with applications in mobile robots. As we have shown, the map created is robust against changes of lighting conditions, and it permits thus to recover the location and orientation of the robot in the map even if there are changes in the illumination of the scene.

ACKNOWLEDGEMENTS

This work has been supported by the Spanish government through the project DPI2007-61197. ‘Sistemas de percepción visual móvil y cooperativo como soporte para la realización de tareas con redes de robots’.

REFERENCES

- Adini, Y., Moses, I., Ullman, S., 1997. Face recognition: the problem of compensating for changes in illumination direction. In *IEEE Trans. Pattern Analysis and Machine Intelligence*, Vol. 19, No. 7, pp. 721-732.
- Bischof, H., Wildenauer, H., Leonardis, A., 2004. Illumination intensive recognition using eigenspaces. In *ELSEVIER Computer Vision and Image Understanding*, Vol. 95, No. 1, pp. 86-104.
- De Araujo, V., Maia, R., D’Angelo, M., D’Angelo, G., 2006. Automatic Plate Detection using genetic algorithm. In *Proc. World Scientific and Engineering Academy and Society*, pp. 43-48.
- Faraid, H., Adelson, E., 1999. Separating reflections and lighting using independent components analysis. In *Proc. IEEE Computer Society Conf. Computer Vision and Pattern Recognition*, Vol. 1, pp. 1262-1267.
- Gil, A., Martinez, O., Ballesta, M., Reinoso, O., 2009. A comparative evaluation of interest point detectors and local descriptors for visual SLAM. In *SPRINGER Machine Vision and Applications*.
- Gonzalez, R.C., Woods, R.E., 1993. Digital Image Processing. Ed. Addison Wesley.
- Jogan, M., Leonardis, A., 2000. Robust Localization Using Eigenspace of Spinning-Images. In *Proc. IEEE Workshop on Omnidirectional Vision*, Hilton Head Island, USA, pp. 37-44, IEEE.
- Kröse, B., Bunschoten, R., Hagen, S., Terwijn, B., Vlassis, N., 2004. Household robots: Look and learn. In *IEEE Robotics & Automation magazine*, Vol. 11, No. 4, pp. 45-52.
- Menegatti, E., Maeda, T., Ishiguro, H., 2004. Image-based memory for robot navigation using properties of omnidirectional images. In *Robotics and Autonomous Systems*, Vol. 47, No. 4, pp. 251-276.
- Murase, H., Nayar, S., 1994. Illumination planning for object recognition using parametric eigenspaces. In *IEEE Trans. Pattern Anal. Mach. Intell.*, Vol 16, pp. 1219-1227.
- Payá, L., Reinoso, O., Gil, A., Sogorb, J., 2008. Multi-robot route following using omnidirectional vision and appearance-based representation of the environment. In *Lecture Notes in Artificial Intelligence*, Vol. 5271, pp. 680-687 Springer.
- Payá, L., Fernández, L., Reinoso, O., Gil, O., Úbeda, D., 2009. Appearance-based dense maps creation. Comparison of compression techniques with panoramic images. In *Int. Conf. on Informatic in Control, Automation and Robotic*, Vol. 6, pp. 238-246.
- Rossi, F., Ranganathan, A., Dellaert, F., Menegatti, E., 2008. Toward topological localization with spherical Fourier transform and uncalibrated camera. In *Proc. Int. Conf. on Simulation, Modeling and Programming for Autonomous Robots*, Venice (Italy), pp. 319-330.
- Ueonara, M., Kanade, T., 1998. Optimal approximation of uniformly rotated images: relationship between Karhunen-Loeve expansion and Discrete Cosine Transform. In *IEEE Trans. Image Processing*, Vol. 7, No. 1, pp. 116-119.